

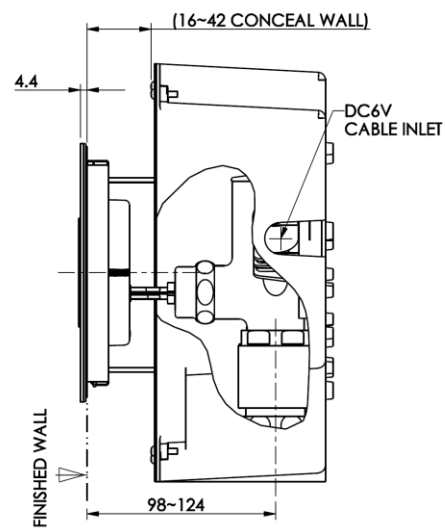


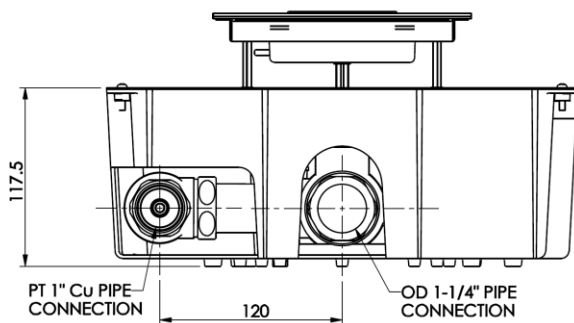

- Type No.** : ECO WC03S
- Description** : WC Sensor Flush Valve
- Power Supply** : 100 ~ 240 VAC 50/60 Hz to 6 VDC
- Finish** : Stainless Steel 316 Hairline Finish
- Actuator Size** : 170 mm x 170 mm
- Box Size** : 310 mm x 275 mm x 117.5 mm
- Features** :
- Auto Dual Flush
 - Push Button Manual Override (Full Flush)
 - Touchless Proximity Sensing Override (Reduced Flush)

Technical Specification :

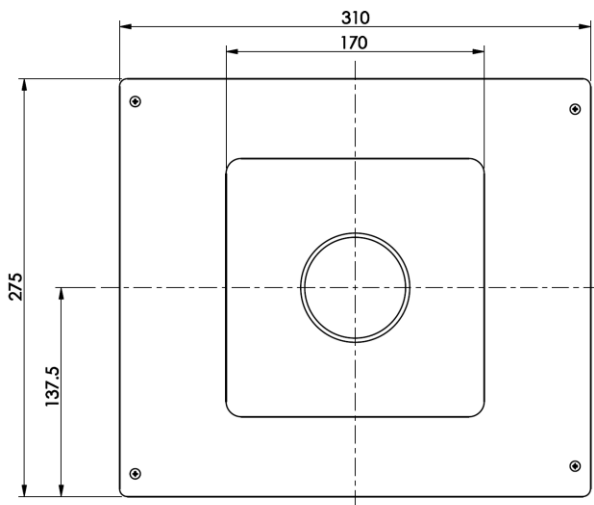

Switching Power Supply	100-240VAC 50/60Hz 0.3A to 6VDC 1.5A PSB SAFETY MARK 171097-11
Operating Pressure	1-7 bar Dynamic
Nominal Water Discharge	3-4.5 litres at 1-3 bar dynamic
Auto Dual Flush	
Sensing Distance	80-90 cm
Delay before Activation	5 sec
Delay before Flush	5 sec
Full Flush Threshold	User Presence > 25 sec
Reduced Flush Threshold	User Presence < 25 sec
Manual Override	Hand Motion - Reduced Flush 2-2.5 litres Push Button - Full Flush
Installation Type	Concealed Box, Service Duct
Wall Opening	150 mm X 150 mm
TÜV SÜD PSB Test Report	7191002687-MEC11/02-LNB

* Power Supply and Auto Flush not applicable to Manual Models

All dimensions in mm